


TAMBOR DE MANDO


BANDA DE 400 mm.

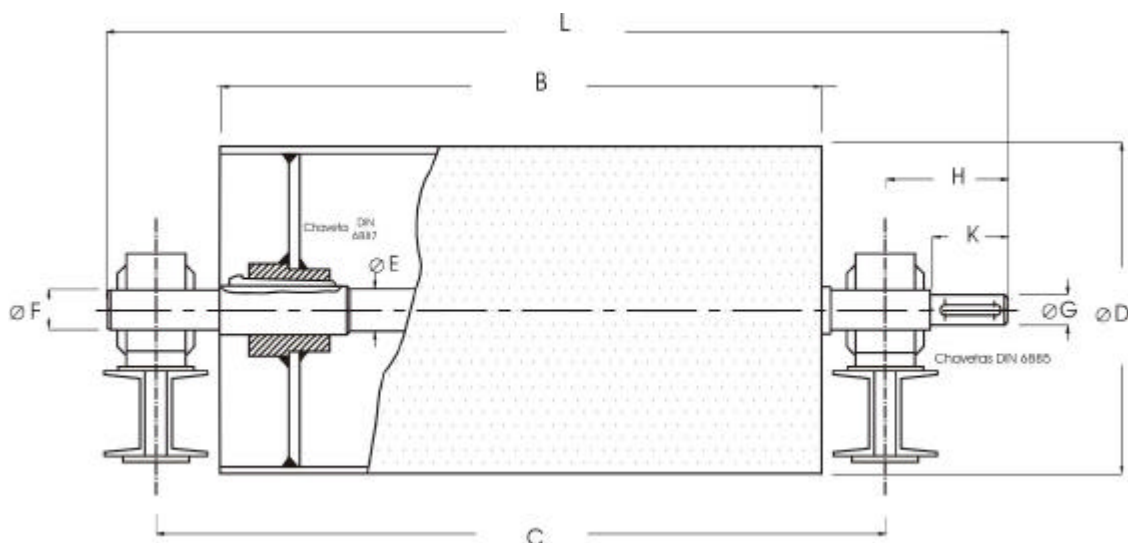

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	40	30	25	500	882	730	101	50	31 Kgs.	SN - 507
	55	40	30		895		112,5	60	38 Kgs.	SN - 509
	65	50	40		925		137,5	80	48 Kgs.	SN - 511
	80	60	50		950		155	90	63 Kgs.	SN - 513
241	40	30	25	500	882	730	101	50	33 Kgs.	SN - 507
	55	40	30		895		112,5	60	40 Kgs.	SN - 509
	65	50	40		925		137,5	80	50 Kgs.	SN - 511
	80	60	50		950		155	90	65 Kgs.	SN - 513
315	55	40	30	500	895	730	112,5	60	50 Kgs.	SN - 509
	65	50	40		925		137,5	80	60 Kgs.	SN - 511
	80	60	50		950		155	90	75 Kgs.	SN - 513
	90	70	60		980		180	110	94 Kgs.	SN - 516
414	55	40	30	500	895	730	112,5	60	74 Kgs.	SN - 509
	65	50	40		925		137,5	80	85 Kgs.	SN - 511
	80	60	50		950		155	90	101 Kgs.	SN - 513
	90	70	60		980		180	110	120 Kgs.	SN - 516
500	65	50	40	500	925	730	137,5	80	106 Kgs.	SN - 511
	80	60	50		950		155	90	120 Kgs.	SN - 513
	90	70	60		980		180	110	139 Kgs.	SN - 516
	108	80	70		1025		212,5	130	159 Kgs.	SN - 518

TAMBOR DE MANDO


BANDA DE 400 mm.

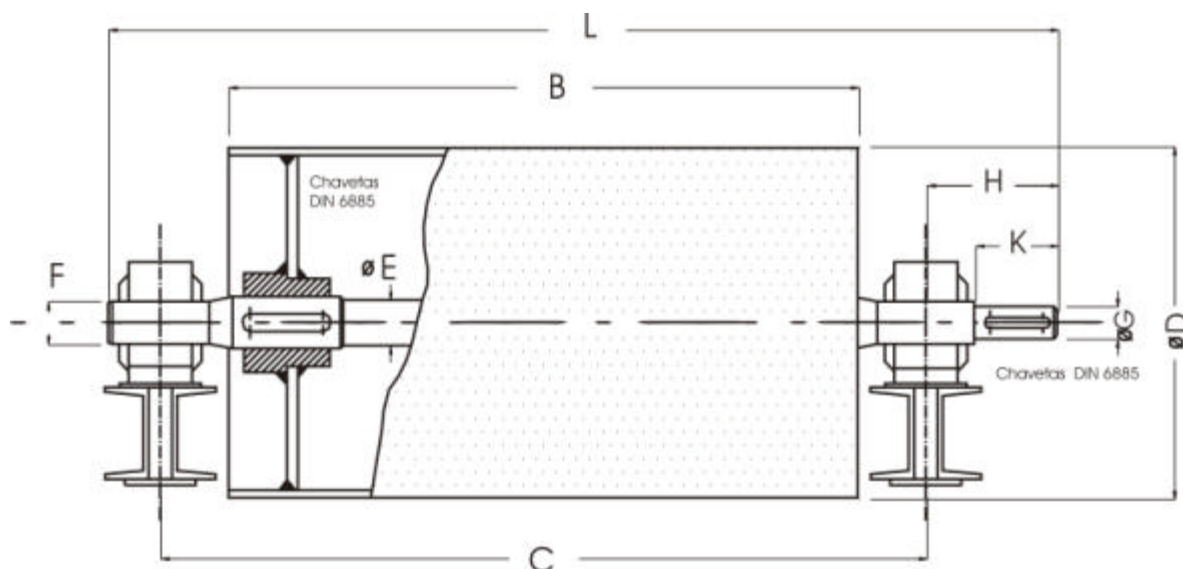

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	40	30	25	500	882	730	101	50	31 Kgs.	SN - 507
	50	40	30		895		112,5	60	37 Kgs.	SN - 509
	60	50	40		925		137,5	80	47 Kgs.	SN - 511
	70	60	50		950		155	90	60 Kgs.	SN - 513
241	40	30	25	500	882	730	101	50	33 Kgs.	SN - 516
	50	40	30		895		112,5	60	39 Kgs.	SN - 518
	60	50	40		925		137,5	80	49 Kgs.	SN - 520
	70	60	50		950		155	90	62 Kgs.	SN - 522
315	50	40	30	500	895	730	112,5	60	49 Kgs.	SN - 509
	60	50	40		925		137,5	80	59 Kgs.	SN - 511
	70	60	50		950		155	90	72 Kgs.	SN - 513
	90	70	60		980		180	110	89 Kgs.	SN - 516
414	50	40	30	500	895	730	112,5	60	73 Kgs.	SN - 509
	60	50	40		925		137,5	80	83 Kgs.	SN - 511
	70	60	50		950		155	90	96 Kgs.	SN - 513
	90	70	60		980		180	110	113 Kgs.	SN - 516
500	60	50	40	500	925	730	137,5	80	104 Kgs.	SN - 511
	70	60	50		950		155	90	117 Kgs.	SN - 513
	80	70	60		980		180	110	134 Kgs.	SN - 516
	90	80	70		1025		212,5	130	153 Kgs.	SN - 518

TAMBOR DE REENVIO


BANDA DE 400 mm.

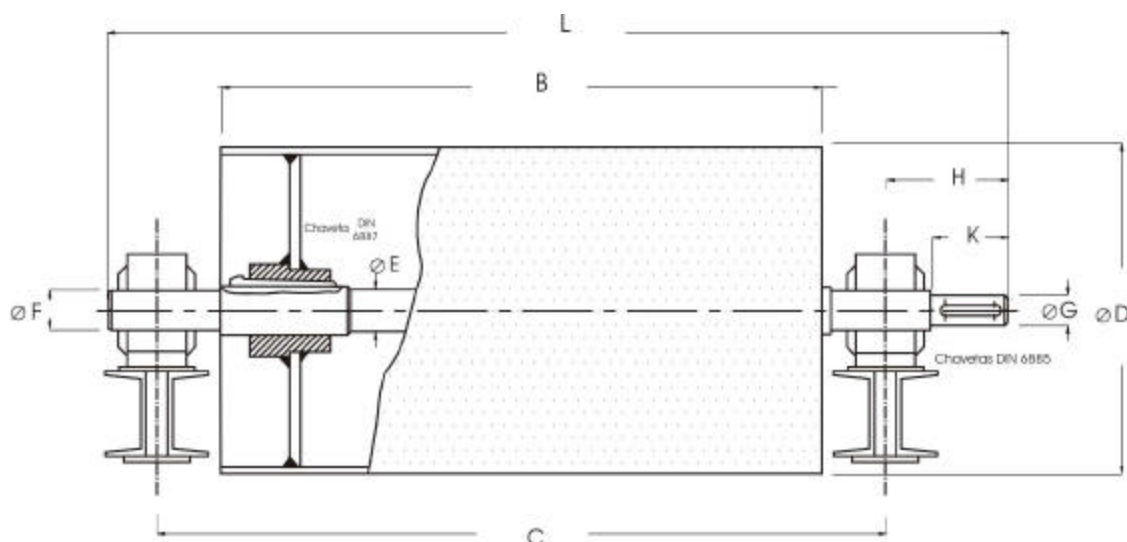

D	E	F	B	L	C	PESO	SOPORTES
216	30	20	500	817	730	25 Kgs.	SN - 505
	40	30		832		30 Kgs.	SN - 507
	50	40		835		38 Kgs.	SN - 509
	60	50		845		48 Kgs.	SN - 511
	70	60		860		64 Kgs.	SN - 513
241	30	20	500	817	730	27 Kgs.	SN - 505
	40	30		832		32 Kgs.	SN - 507
	50	40		835		40 Kgs.	SN - 509
	60	50		845		50 Kgs.	SN - 511
	70	60		860		66 Kgs.	SN - 513
315	40	30	500	832	730	42 Kgs.	SN - 507
	50	40		835		49 Kgs.	SN - 509
	60	50		845		60 Kgs.	SN - 511
	70	60		860		76 Kgs.	SN - 513
	80	70		870		93 Kgs.	SN - 516
414	40	30	500	832	730	65 Kgs.	SN - 507
	50	40		835		73 Kgs.	SN - 509
	60	50		845		84 Kgs.	SN - 511
	70	60		860		100 Kgs.	SN - 513
	80	70		870		117 Kgs.	SN - 516
500	50	40	500	835	730	100 Kgs.	SN - 509
	60	50		845		105 Kgs.	SN - 511
	70	60		860		121 Kgs.	SN - 513
	80	70		870		138 Kgs.	SN - 516
	90	80		895		160 Kgs.	SN - 518

TAMBOR DE REENVIO


BANDA DE 400 mm.

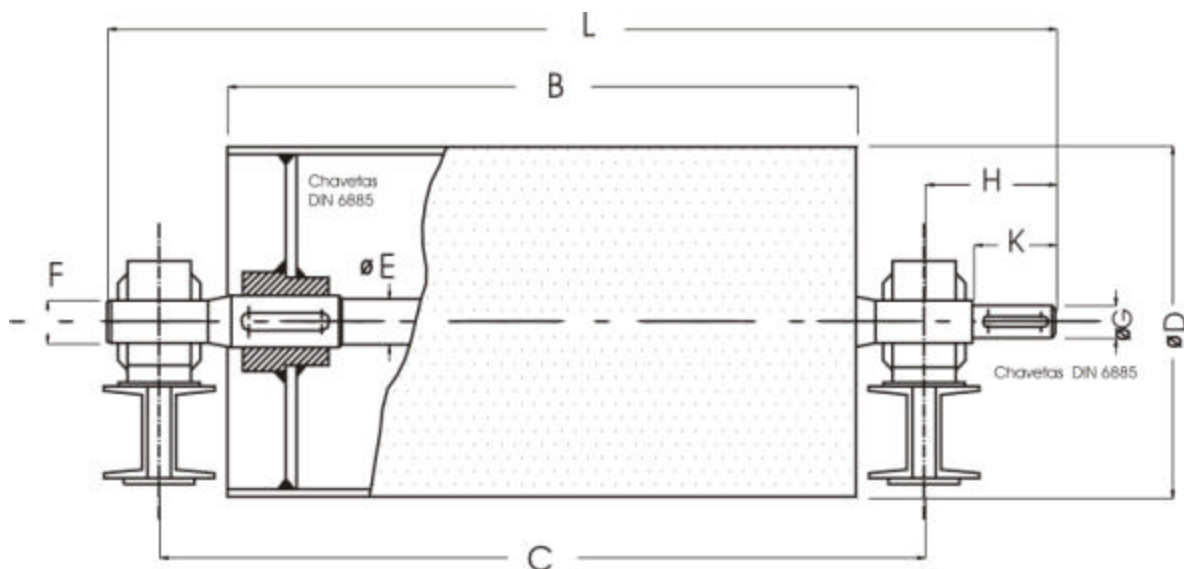

D	E	F	B	L	C	PESO	SOPORTES
216	30	20	500	817	730	25 Kgs.	SN - 505
	40	30		832		30 Kgs.	SN - 507
	50	40		835		36 Kgs.	SN - 509
	60	50		845		45 Kgs.	SN - 511
	70	60		860		57 Kgs.	SN - 513
241	30	20	500	817	730	27 Kgs.	SN - 505
	40	30		832		32 Kgs.	SN - 507
	50	40		835		38 Kgs.	SN - 509
	60	50		845		47 Kgs.	SN - 511
	70	60		860		59 Kgs.	SN - 513
315	40	30	500	832	730	42 Kgs.	SN - 507
	50	40		835		47 Kgs.	SN - 509
	60	50		845		57 Kgs.	SN - 511
	70	60		860		69 Kgs.	SN - 513
	80	70		870		85 Kgs.	SN - 516
414	40	30	500	832	730	65 Kgs.	SN - 507
	50	40		835		71 Kgs.	SN - 509
	60	50		845		81 Kgs.	SN - 511
	70	60		860		93 Kgs.	SN - 513
	80	70		870		109 Kgs.	SN - 516
500	50	40	500	835	730	98 Kgs.	SN - 509
	60	50		845		102 Kgs.	SN - 511
	70	60		860		114 Kgs.	SN - 513
	80	70		870		130 Kgs.	SN - 516
	90	80		895		146 Kgs.	SN - 518

TAMBOR DE MANDO


BANDA DE 500 mm.

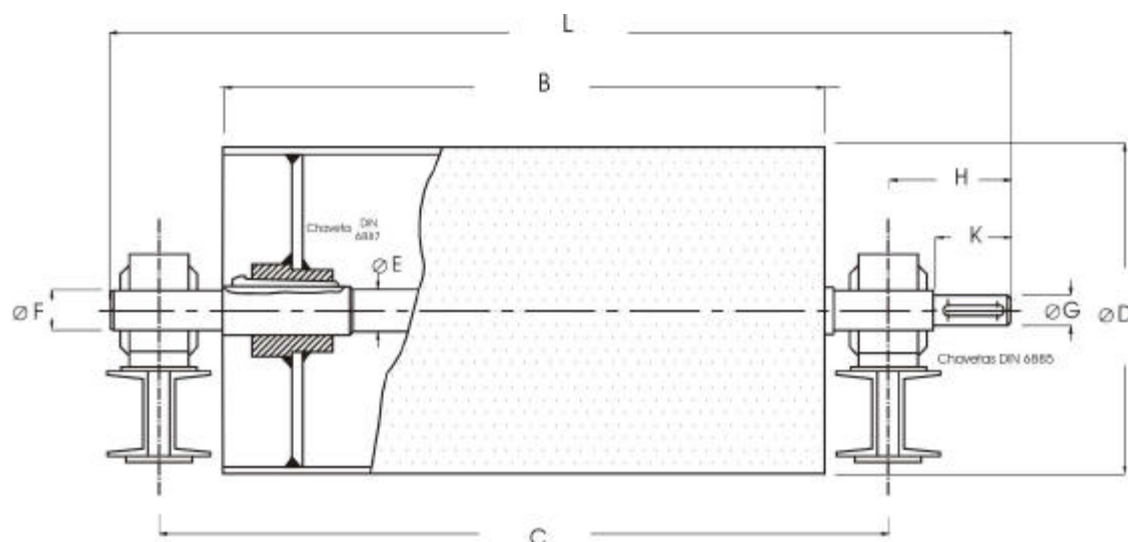

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	55	40	30	600	995	830	112,5	60	44 Kgs.	SN - 509
	65	50	40		1025		137,5	80	56 Kgs.	SN - 511
	80	60	50		1050		155	90	75 Kgs.	SN - 513
	90	70	60		1080		180	110	94 Kgs.	SN - 516
241	55	40	30	600	995	830	112,5	60	47 Kgs.	SN - 509
	65	50	40		1025		137,5	80	59 Kgs.	SN - 511
	80	60	50		1050		155	90	78 Kgs.	SN - 513
	90	70	60		1080		180	110	97 Kgs.	SN - 516
315	55	40	30	600	995	830	112,5	60	59 Kgs.	SN - 509
	65	50	40		1025		137,5	80	70 Kgs.	SN - 511
	80	60	50		1050		155	90	88 Kgs.	SN - 513
	90	70	60		1080		180	110	108 Kgs.	SN - 516
414	55	40	30	600	995	830	112,5	60	85 Kgs.	SN - 509
	65	50	40		1025		137,5	80	97 Kgs.	SN - 511
	80	60	50		1050		155	90	115 Kgs.	SN - 513
	90	70	60		1080		180	110	134 Kgs.	SN - 516
	105	80	70		1125		212,5	130	163 Kgs.	SN - 518
500	65	50	40	600	1025	830	137,5	80	120 Kgs.	SN - 511
	80	60	50		1050		155	90	130 Kgs.	SN - 513
	90	70	60		1080		180	110	157 Kgs.	SN - 516
	105	80	70		1125		212,5	130	186 Kgs.	SN - 518

TAMBOR DE MANDO


BANDA DE 500 mm.

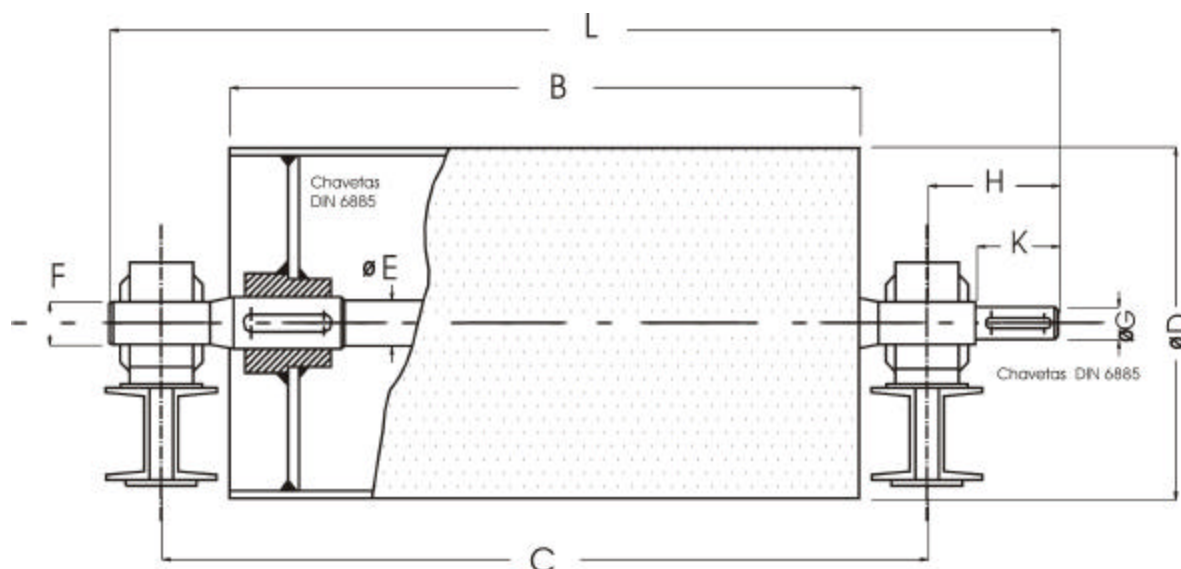

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	50	40	30	600	995	830	112,5	60	41 Kgs.	SN - 509
	60	50	40		1025		137,5	80	52 Kgs.	SN - 511
	70	60	50		1050		155	90	66 Kgs.	SN - 513
	80	70	60		1080		180	110	83 Kgs.	SN - 516
216	50	40	30	600	995	830	112,5	60	44 Kgs.	SN - 509
	60	50	40		1025		137,5	80	55 Kgs.	SN - 511
	70	60	50		1050		155	90	69 Kgs.	SN - 513
	80	70	60		1080		180	110	86 Kgs.	SN - 516
216	50	40	30	600	995	830	112,5	60	55 Kgs.	SN - 509
	60	50	40		1025		137,5	80	66 Kgs.	SN - 511
	70	60	50		1050		155	90	79 Kgs.	SN - 513
	80	70	60		1080		180	110	97 Kgs.	SN - 516
414	50	40	30	600	995	830	112,5	60	82 Kgs.	SN - 509
	60	50	40		1025		137,5	80	93 Kgs.	SN - 511
	70	60	50		1050		155	90	106 Kgs.	SN - 513
	80	70	60		1080		180	110	123 Kgs.	SN - 516
500	60	50	40	600	1025	830	137,5	80	116 Kgs.	SN - 511
	70	60	50		1050		155	90	129 Kgs.	SN - 513
	80	70	60		1080		180	110	146 Kgs.	SN - 516
	90	80	70		1125		212,5	130	168 Kgs.	SN - 518

TAMBOR DE REENVIO


BANDA DE 500 mm.

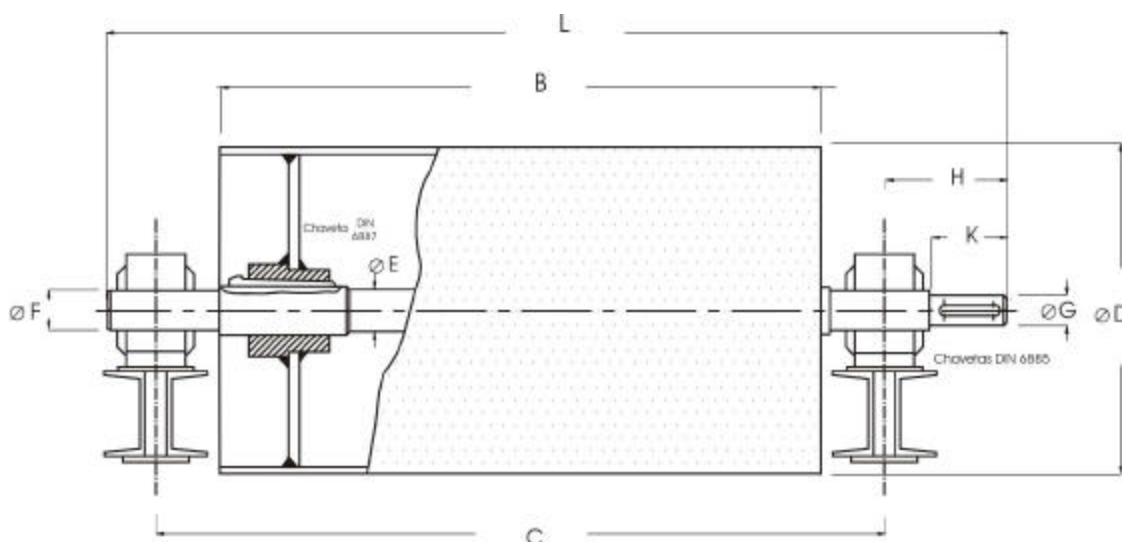

D	E	F	B	L	C	PESO	SOPORTES
216	40	30	600	932	830	34 Kgs.	SN - 507
	55	40		935		43 Kgs.	SN - 509
	65	50		945		55 Kgs.	SN - 511
	80	60		960		72 Kgs.	SN - 513
	90	70		970		90 Kgs.	SN - 516
241	40	30	600	932	830	37 Kgs.	SN - 507
	55	40		935		46 Kgs.	SN - 509
	65	50		945		58 Kgs.	SN - 511
	80	60		960		75 Kgs.	SN - 513
	90	70		970		93 Kgs.	SN - 516
315	40	30	600	832	830	48 Kgs.	SN - 507
	55	40		835		57 Kgs.	SN - 509
	65	50		845		69 Kgs.	SN - 511
	80	60		860		85 Kgs.	SN - 513
	90	70		870		104 Kgs.	SN - 516
414	40	30	600	832	830	75 Kgs.	SN - 507
	55	40		835		84 Kgs.	SN - 509
	65	50		845		96 Kgs.	SN - 511
	80	60		860		111 Kgs.	SN - 513
	90	70		870		129 Kgs.	SN - 516
500	55	40	600	835	830	107 Kgs.	SN - 509
	65	50		845		118 Kgs.	SN - 511
	80	60		860		134 Kgs.	SN - 513
	90	70		870		152 Kgs.	SN - 516
	105	80		895		117 Kgs.	SN - 518

TAMBOR DE REENVIO


BANDA DE 500 mm.

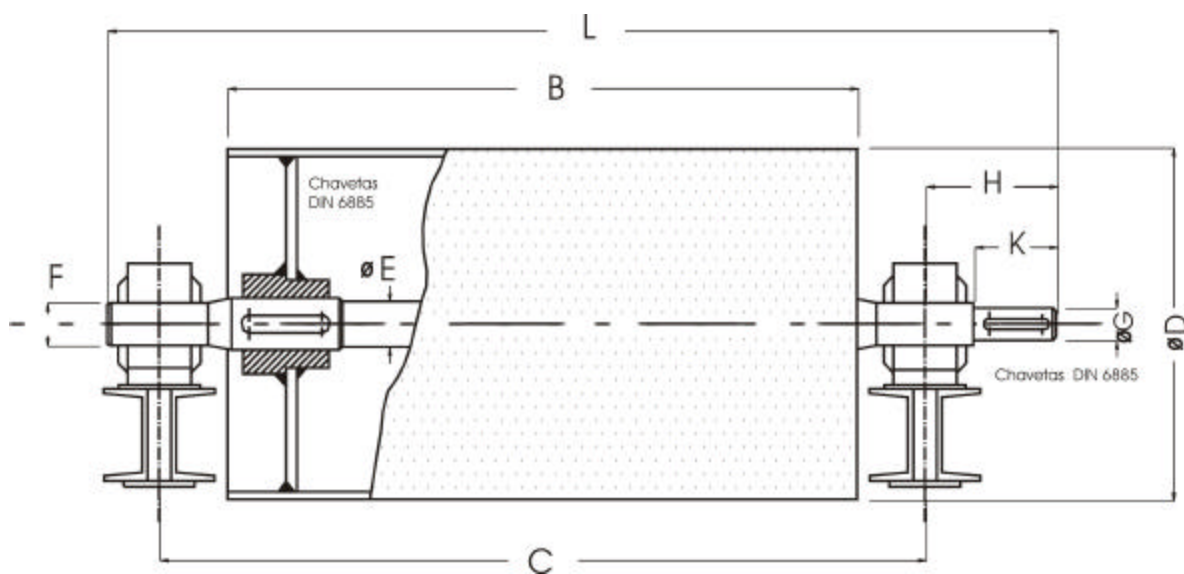

D	E	F	B	L	C	PESO	SOPORTES
216	40	30	600	932	830	34 Kgs.	SN - 507
	50	40		935		40 Kgs.	SN - 509
	60	50		945		51 Kgs.	SN - 511
	70	60		960		64 Kgs.	SN - 513
	80	70		970		80 Kgs.	SN - 516
241	40	30	600	932	830	37 Kgs.	SN - 507
	50	40		935		43 Kgs.	SN - 509
	60	50		945		54 Kgs.	SN - 511
	70	60		960		67 Kgs.	SN - 513
	80	70		970		83 Kgs.	SN - 516
315	40	30	600	932	830	48 Kgs.	SN - 507
	50	40		935		54 Kgs.	SN - 509
	60	50		945		65 Kgs.	SN - 511
	70	60		960		77 Kgs.	SN - 513
	80	70		970		94 Kgs.	SN - 516
414	40	30	600	932	830	75 Kgs.	SN - 507
	50	40		935		81 Kgs.	SN - 509
	60	50		945		92 Kgs.	SN - 511
	70	60		960		103 Kgs.	SN - 513
	80	70		970		119 Kgs.	SN - 516
500	50	40	600	935	830	104 Kgs.	SN - 509
	60	50		945		114 Kgs.	SN - 511
	70	60		960		126 Kgs.	SN - 513
	80	70		970		142 Kgs.	SN - 516
	90	80		995		161 Kgs.	SN - 518

TAMBOR DE MANDO


BANDA DE 650 mm.

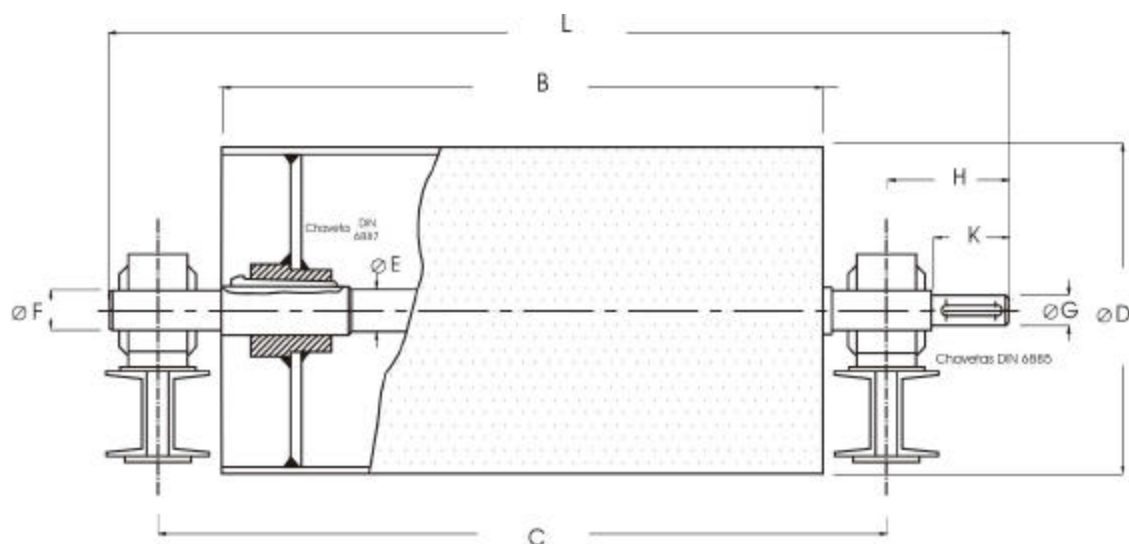

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
241	55	40	30	750	1155	990	112,5	60	55Kgs.	SN - 509
	65	50	40		1185		137,5	80	68 Kgs.	SN - 511
	80	60	50		1210		155	90	88 Kgs.	SN - 513
	90	70	60		1240		180	110	108 Kgs.	SN - 516
315	55	40	30	750	1155	990	112,5	60	67 Kgs.	SN - 509
	65	50	40		1185		137,5	80	80 Kgs.	SN - 511
	80	60	50		1210		155	90	100 Kgs.	SN - 513
	90	70	60		1240		180	110	120 Kgs.	SN - 516
	105	80	70		1285		212,5	130	150 Kgs.	SN - 518
414	65	50	40	750	1185	990	137,5	80	112 Kgs.	SN - 511
	80	60	50		1210		155	90	131Kgs.	SN - 513
	90	70	60		1240		180	110	153 Kgs.	SN - 516
	105	80	70		1285		212,5	130	182 Kgs.	SN - 518
	115	90	80		1320		240	150	212 Kgs.	SN - 520
500	65	50	40	750	1185	990	137,5	80	138 Kgs.	SN - 511
	80	60	50		1210		155	90	158 Kgs.	SN - 513
	90	70	60		1240		180	110	178 Kgs.	SN - 516
	105	80	70		1285		212,5	130	209 Kgs.	SN - 518
	115	90	80		1320		240	150	238 Kgs.	SN - 520
630	80	60	50	750	1210	990	155	90	222 Kgs.	SN - 513
	90	70	60		1240		180	110	243 Kgs.	SN - 516
	105	80	70		1285		212,5	130	273 Kgs.	SN - 518
	115	90	80		1320		240	150	302 Kgs.	SN - 520
	130	100	90		1355		267,5	170	344 Kgs.	SN - 522

TAMBOR DE MANDO


BANDA DE 650 mm.

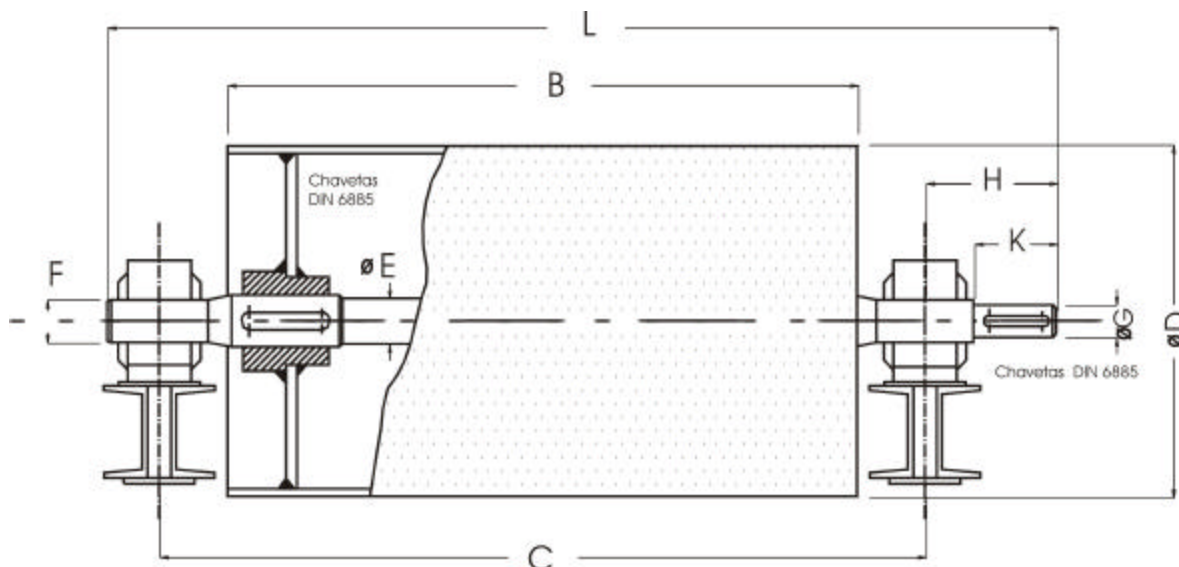

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	50	40	30	750	1155	990	112,5	60	52 Kgs.	SN - 509
	60	50	40		1185		137,5	80	64 Kgs.	SN - 511
	70	60	50		1210		155	90	79 Kgs.	SN - 513
	80	70	60		1240		180	110	97 Kgs.	SN - 516
216	50	40	30	750	1155	990	112,5	60	64 Kgs.	SN - 509
	60	50	40		1185		137,5	80	76 Kgs.	SN - 511
	70	60	50		1210		155	90	91 Kgs.	SN - 513
	80	70	60		1240		180	110	109 Kgs.	SN - 516
	90	80	70		1285		212,5	130	133 Kgs.	SN - 518
216	60	50	40	750	1185	990	137,5	80	108 Kgs.	SN - 511
	70	60	50		1210		155	90	123 Kgs.	SN - 513
	80	70	60		1240		180	110	142 Kgs.	SN - 516
	90	80	70		1285		212,5	130	165 Kgs.	SN - 518
	100	90	80		1320		240	150	192 Kgs.	SN - 520
414	60	50	40	750	1185	990	137,5	80	134 Kgs.	SN - 511
	70	60	50		1210		155	90	149 Kgs.	SN - 513
	80	70	60		1240		180	110	167 Kgs.	SN - 516
	90	80	70		1285		212,5	130	191 Kgs.	SN - 518
	100	90	80		1320		240	150	218 Kgs.	SN - 520
500	70	60	50	750	1210	990	155	90	213 Kgs.	SN - 513
	80	70	60		1240		180	110	232 Kgs.	SN - 516
	90	80	70		1285		212,5	130	255 Kgs.	SN - 518
	100	90	80		1320		240	150	282 Kgs.	SN - 520
	110	100	90		1355		267,5	170	314 Kgs.	SN - 522

TAMBOR DE REENVIO


BANDA DE 650 mm.

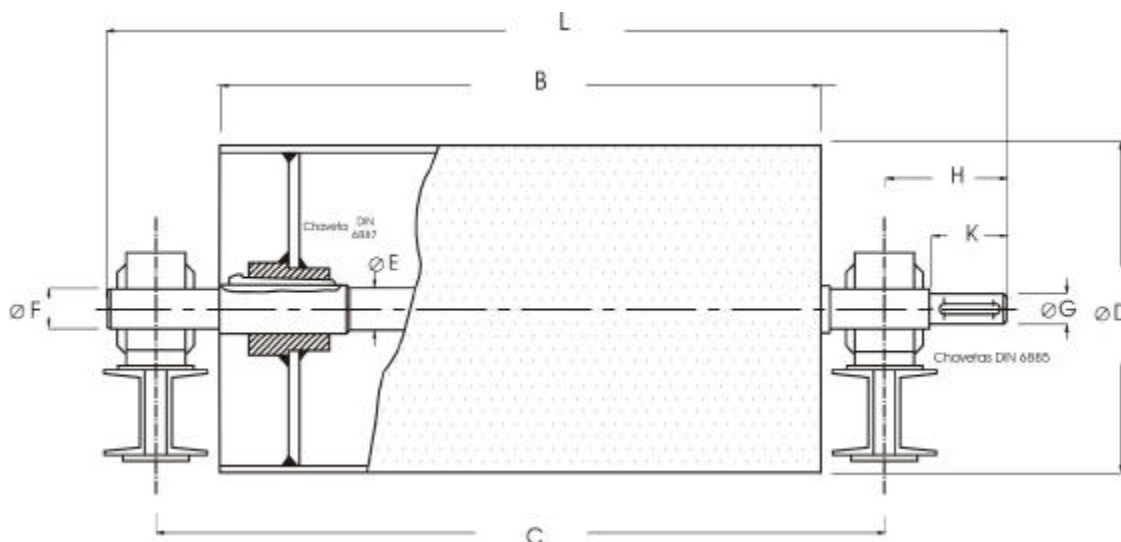

D	E	F	B	L	C	PESO	SOPORTES
216	40	30	750	1092	990	40 Kgs.	SN - 507
	55	40		1095		50 Kgs.	SN - 509
	65	50		1105		62 Kgs.	SN - 511
	80	60		1120		80 Kgs.	SN - 513
	90	70		1130		99 Kgs.	SN - 516
241	40	30	750	1092	990	44 Kgs.	SN - 507
	55	40		1095		54 Kgs.	SN - 509
	65	50		1105		66 Kgs.	SN - 511
	80	60		1120		84 Kgs.	SN - 513
	90	70		1130		103 Kgs.	SN - 516
315	40	30	750	1092	990	56 Kgs.	SN - 507
	55	40		1095		66 Kgs.	SN - 509
	65	50		1105		78 Kgs.	SN - 511
	80	60		1120		96 Kgs.	SN - 513
	90	70		1130		115 Kgs.	SN - 516
414	55	40	750	1095	990	98 Kgs.	SN - 509
	65	50		1105		110 Kgs.	SN - 511
	80	60		1120		128Kgs.	SN - 513
	90	70		1130		138Kgs.	SN - 516
	105	80		1155		174 Kgs.	SN - 518
500	55	40	750	1095	990	124 Kgs.	SN - 509
	65	50		1105		136 Kgs.	SN - 511
	80	60		1120		154 Kgs.	SN - 513
	90	70		1130		173 Kgs.	SN - 516
	105	80		1155		200 Kgs.	SN - 518

TAMBOR DE REENVIO


BANDA DE 650 mm.

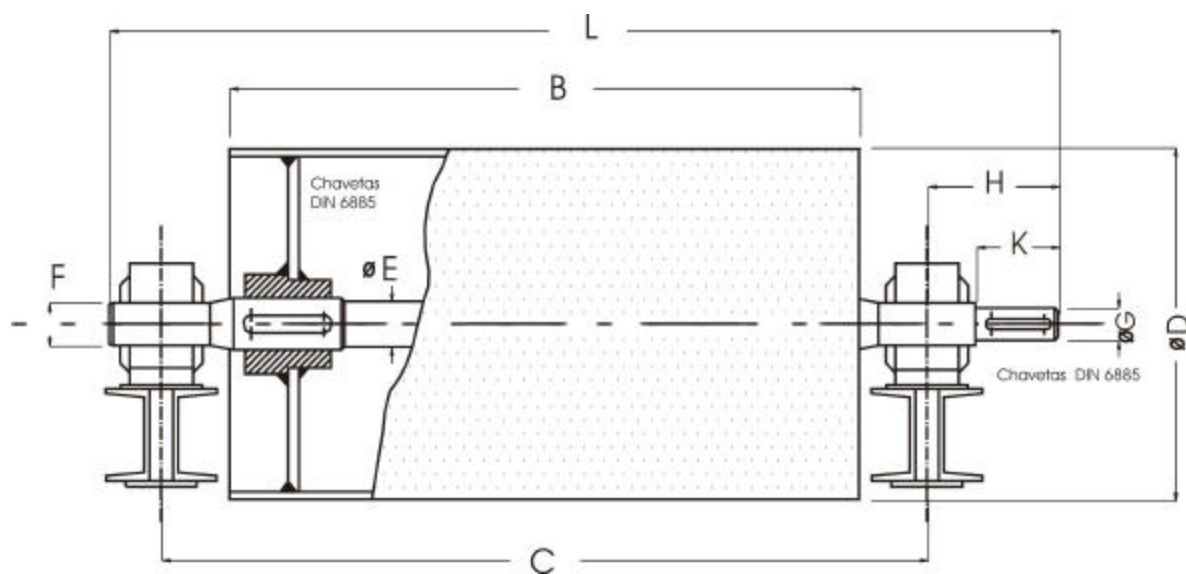

D	E	F	B	L	C	PESO	SOPORTES
216	40	30	750	1092	990	40 Kgs.	SN - 507
	50	40		1095		47 Kgs.	SN - 509
	60	50		1105		58 Kgs.	SN - 511
	70	60		1120		72 Kgs.	SN - 513
	80	70		1130		89 Kgs.	SN - 516
241	40	30	750	1092	990	44 Kgs.	SN - 507
	50	40		1095		51 Kgs.	SN - 509
	60	50		1105		62 Kgs.	SN - 511
	70	60		1120		76 Kgs.	SN - 513
	80	70		1130		93 Kgs.	SN - 516
315	40	30	750	1092	990	56 Kgs.	SN - 507
	50	40		1095		63 Kgs.	SN - 509
	60	50		1105		74 Kgs.	SN - 511
	70	60		1120		88 Kgs.	SN - 513
	80	70		1130		105 Kgs.	SN - 516
414	40	30	750	1095	990	95 Kgs.	SN - 507
	50	40		1105		106 Kgs.	SN - 509
	60	50		1120		120 Kgs.	SN - 511
	70	60		1130		138 Kgs.	SN - 513
	80	70		1155		158 Kgs.	SN - 516
500	50	40	750	1095	990	121 Kgs.	SN - 509
	60	50		1105		132 Kgs.	SN - 511
	70	60		1120		146 Kgs.	SN - 513
	80	70		1130		163 Kgs.	SN - 516
	90	80		1155		184 Kgs.	SN - 518

TAMBOR DE MANDO


BANDA DE 800 mm.

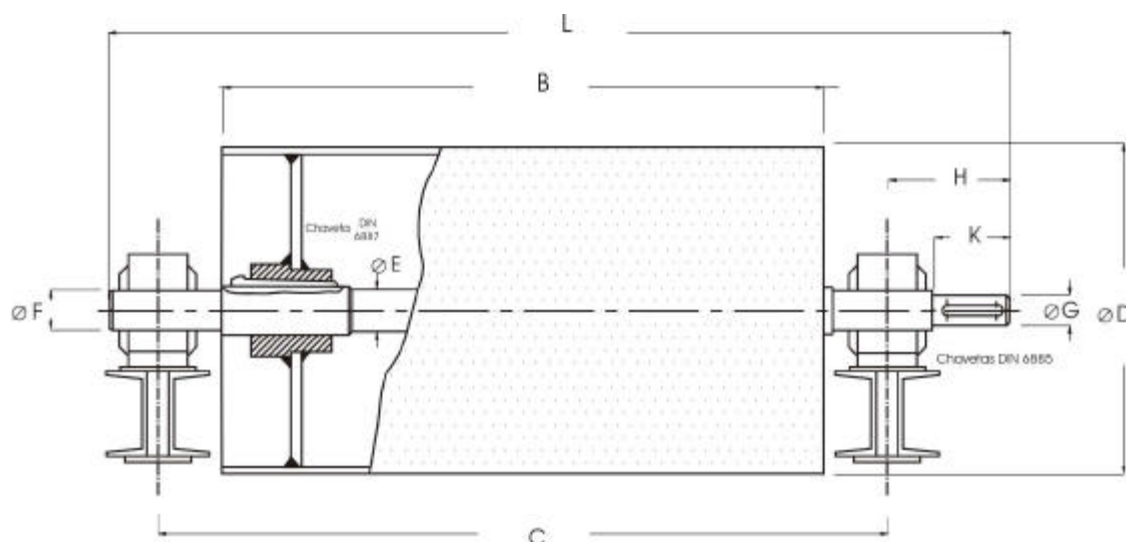

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
315	65	50	40	950	1385	1190	137,5	80	95 Kgs.	SN - 511
	80	60	50		1410		155	90	116 Kgs.	SN - 513
	90	70	60		1440		180	110	139 Kgs.	SN - 516
	105	80	70		1485		212,5	130	171 Kgs.	SN - 518
414	65	50	40	750	1385	990	137,5	80	132 Kgs.	SN - 511
	80	60	50		1410		155	90	154 Kgs.	SN - 513
	90	70	60		1440		180	110	177 Kgs.	SN - 516
	105	80	70		1485		212,5	130	209 Kgs.	SN - 518
500	115	90	80	750	1520	990	240	150	240 Kgs.	SN - 520
	80	60	50		1410		155	90	184 Kgs.	SN - 513
	90	70	60		1440		180	110	207 Kgs.	SN - 516
	105	80	70		1485		212,5	130	239 Kgs.	SN - 518
630	115	90	80	750	1520	990	240	150	270 Kgs.	SN - 520
	130	100	90		1555		267,5	170	315 Kgs.	SN - 522
	140	110	100		1585		292,5	190	391 Kgs.	SN - 522
	90	70	60		1440		180	110	282 Kgs.	SN - 516
800	105	80	70	750	1485	990	212,5	130	315 Kgs.	SN - 518
	115	90	80		1520		240	150	346 Kgs.	SN - 520
	130	100	90		1555		267,5	170	391 Kgs.	SN - 522
	140	110	100		1585		292,5	190	432 Kgs.	SN - 524
	105	80	70		1485		212,5	130	437 Kgs.	SN - 518
	115	90	80	1520	240	150	469 Kgs.	SN - 520		
	130	100	90	1555	267,5	170	513 Kgs.	SN - 522		
	140	110	100	1585	292,5	190	555 Kgs.	SN - 524		
	155	125	110	1615	312,5	200	627 Kgs.	SN - 528		

TAMBOR DE MANDO


BANDA DE 800 mm.

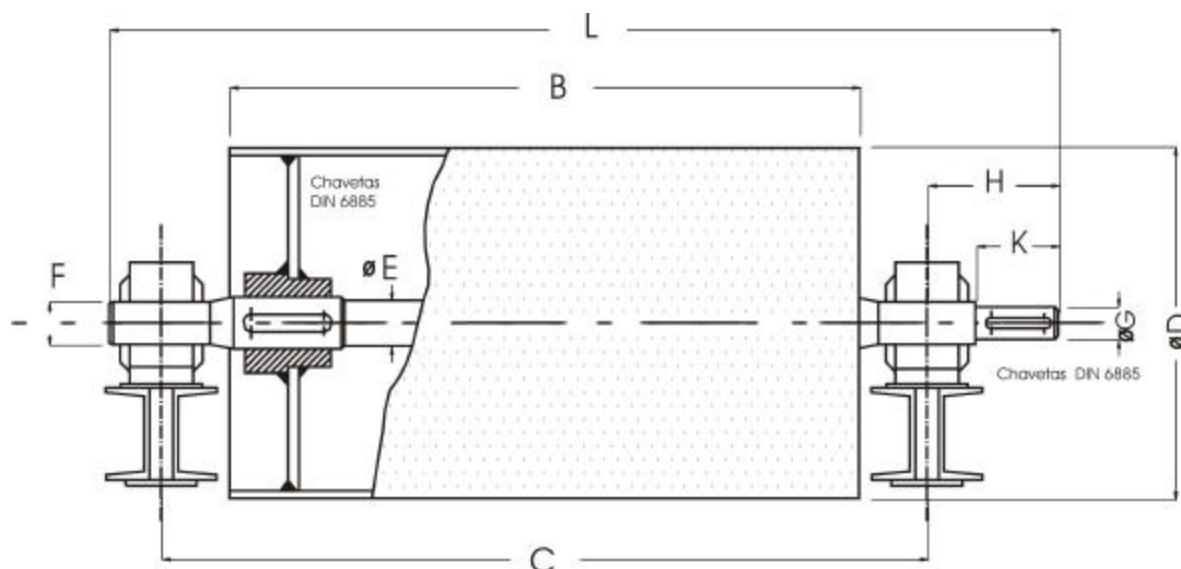

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
216	50	40	30	750	1155	990	112,5	60	52 Kgs.	SN - 509
	60	50	40		1185		137,5	80	64 Kgs.	SN - 511
	70	60	50		1210		155	90	79 Kgs.	SN - 513
	80	70	60		1240		180	110	97 Kgs.	SN - 516
216	50	40	30	750	1155	990	112,5	60	64 Kgs.	SN - 509
	60	50	40		1185		137,5	80	76 Kgs.	SN - 511
	70	60	50		1210		155	90	91 Kgs.	SN - 513
	80	70	60		1240		180	110	109 Kgs.	SN - 516
	90	80	70		1285		212,5	130	133 Kgs.	SN - 518
216	60	50	40	750	1185	990	137,5	80	108 Kgs.	SN - 511
	70	60	50		1210		155	90	123 Kgs.	SN - 513
	80	70	60		1240		180	110	142 Kgs.	SN - 516
	90	80	70		1285		212,5	130	165 Kgs.	SN - 518
	100	90	80		1320		240	150	192 Kgs.	SN - 520
414	60	50	40	750	1185	990	137,5	80	134 Kgs.	SN - 511
	70	60	50		1210		155	90	149 Kgs.	SN - 513
	80	70	60		1240		180	110	167 Kgs.	SN - 516
	90	80	70		1285		212,5	130	191 Kgs.	SN - 518
	100	90	80		1320		240	150	218 Kgs.	SN - 520
500	70	60	50	750	1210	990	155	90	213 Kgs.	SN - 513
	80	70	60		1240		180	110	232 Kgs.	SN - 516
	90	80	70		1285		212,5	130	255 Kgs.	SN - 518
	100	90	80		1320		240	150	282 Kgs.	SN - 520
	110	100	90		1355		267,5	170	314 Kgs.	SN - 522

TAMBOR DE REENVIO


BANDA DE 800 mm.

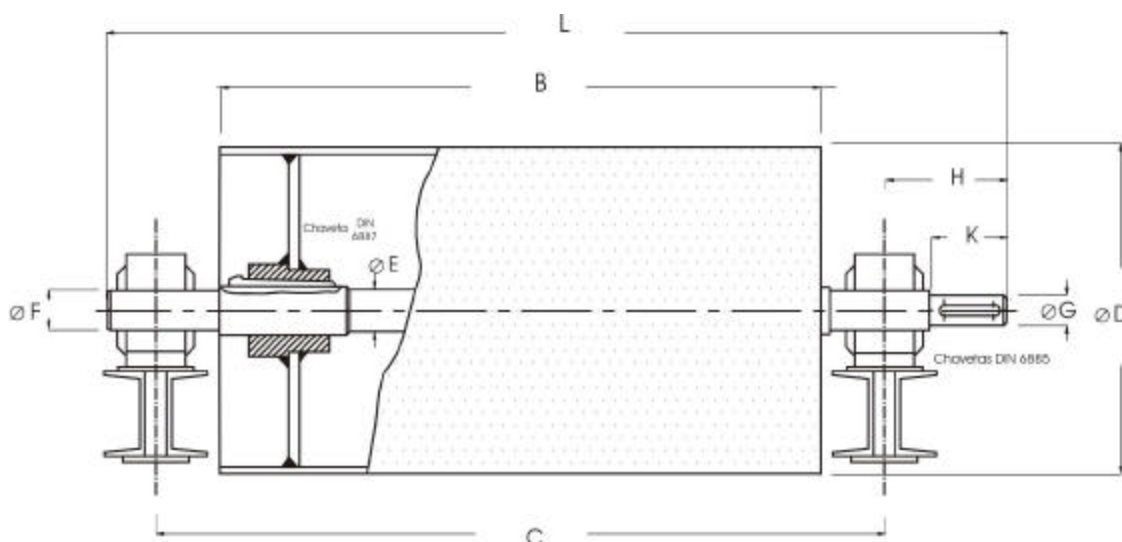

D	E	F	B	L	C	PESO	SOPORTES
241	55	40	950	1295	1190	73 Kgs.	SN - 509
	65	50		1305		86 Kgs.	SN - 511
	80	60		1320		107 Kgs.	SN - 513
	90	70		1330		128 Kgs.	SN - 516
	105	80		1355		159 Kgs.	SN - 518
315	55	40	950	1295	1190	80 Kgs.	SN - 509
	65	50		1305		93 Kgs.	SN - 511
	80	60		1320		114 Kgs.	SN - 513
	90	70		1330		135 Kgs.	SN - 516
	105	80		1355		166 Kgs.	SN - 518
414	65	50	950	1305	1190	130 Kgs.	SN - 511
	80	60		1320		152 Kgs.	SN - 513
	90	70		1330		173 Kgs.	SN - 516
	105	80		1355		204 Kgs.	SN - 518
	115	90		1370		234 Kgs.	SN - 520
500	65	50	950	1305	1190	160 Kgs.	SN - 511
	80	60		1320		182 Kgs.	SN - 513
	90	70		1330		203 Kgs.	SN - 516
	105	80		1355		234 Kgs.	SN - 518
	115	90		1370		264 Kgs.	SN - 520
630	65	50	950	1305	1190	235 Kgs.	SN - 511
	80	60		1320		257 Kgs.	SN - 513
	90	70		1330		278 Kgs.	SN - 516
	105	80		1355		309 Kgs.	SN - 518
	115	90		1370		339 Kgs.	SN - 520

TAMBOR DE REENVIO


BANDA DE 800 mm.

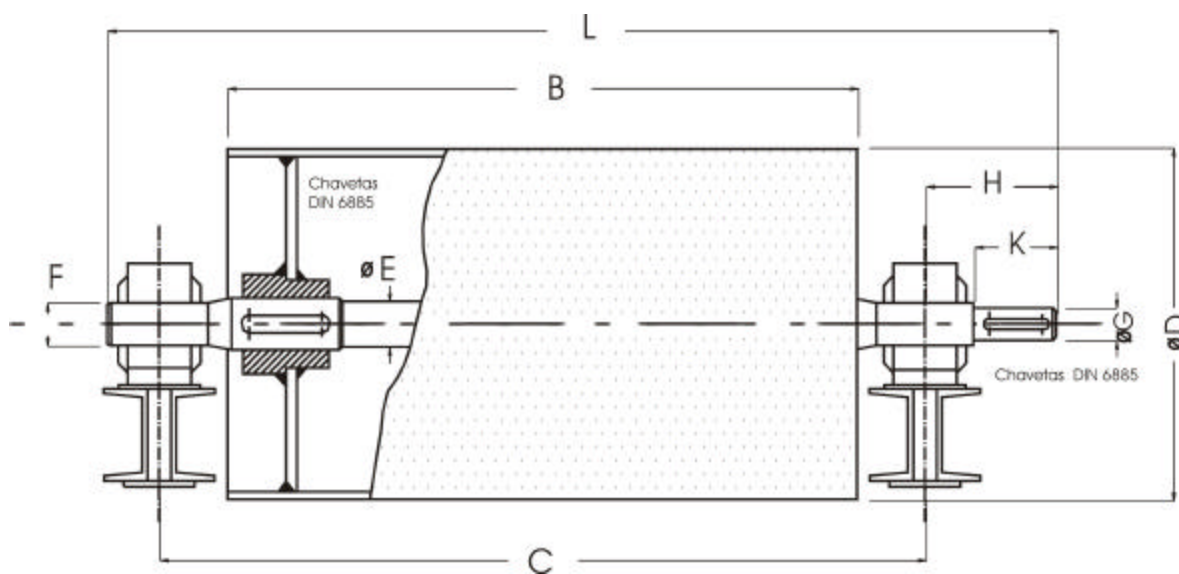

D	E	F	B	L	C	PESO	SOPORTES
241	50	40	950	1295	1190	69 Kgs.	SN - 509
	60	50		1305		81 Kgs.	SN - 511
	70	60		1320		96 Kgs.	SN - 513
	80	70		1330		116 Kgs.	SN - 516
	90	80		1355		138 Kgs.	SN - 518
315	50	40	950	1295	1190	76 Kgs.	SN - 509
	60	50		1305		88 Kgs.	SN - 511
	70	60		1320		103 Kgs.	SN - 513
	80	70		1330		123 Kgs.	SN - 516
	90	80		1355		145 Kgs.	SN - 518
414	60	50	950	1305	1190	125 Kgs.	SN - 511
	70	60		1320		141 Kgs.	SN - 513
	80	70		1330		161 Kgs.	SN - 516
	90	80		1355		183 Kgs.	SN - 518
	100	90		1370		210 Kgs.	SN - 520
500	60	50	950	1305	1190	155 Kgs.	SN - 511
	70	60		1320		171 Kgs.	SN - 513
	80	70		1330		191 Kgs.	SN - 516
	90	80		1355		213 Kgs.	SN - 518
	100	90		1370		240 Kgs.	SN - 520
630	60	50	950	1305	1190	230 Kgs.	SN - 511
	70	60		1320		246 Kgs.	SN - 513
	80	70		1330		266 Kgs.	SN - 516
	90	80		1355		288 Kgs.	SN - 518
	100	90		1370		315 Kgs.	SN - 520

TAMBOR DE MANDO


BANDA DE 1000 mm.

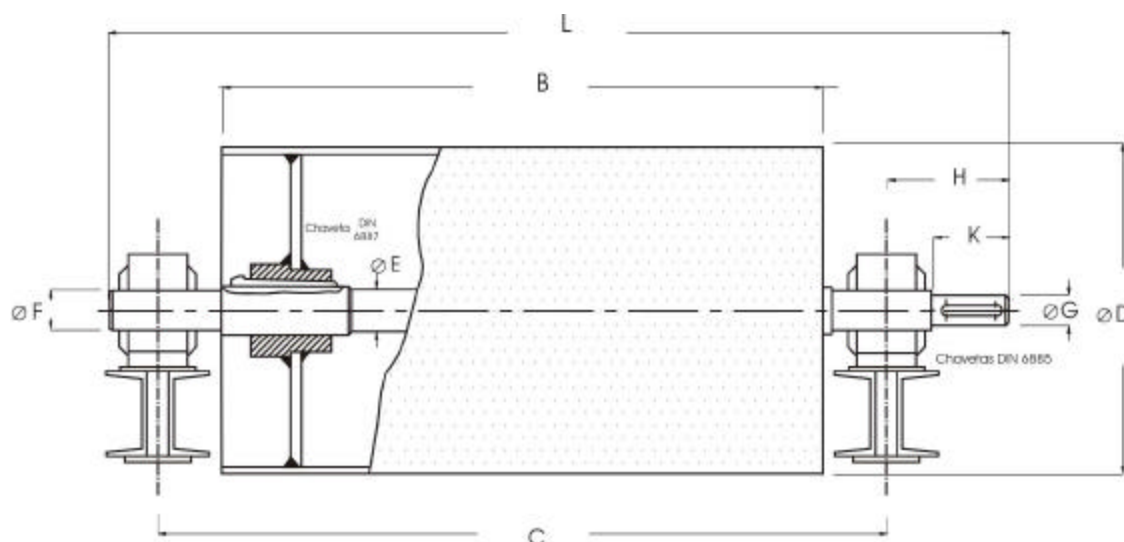

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
414	80	60	50	1150	1610	1390	155	90	181 Kgs.	SN - 513
	90	70	60		1640		180	110	207 Kgs.	SN - 516
	105	80	70		1685		212,5	130	245 Kgs.	SN - 518
	115	90	80		1720		240	150	280 Kgs.	SN - 520
500	90	70	60	1150	1640	1390	180	110	266 Kgs.	SN - 516
	105	80	70		1685		212,5	130	294 Kgs.	SN - 518
	115	90	80		1720		240	150	336 Kgs.	SN - 520
	130	100	90		1755		267,5	170	376 Kgs.	SN - 522
630	140	110	110	1150	1785	1390	292,5	190	437 Kgs.	SN - 524
	105	80	70		1685		212,5	130	392 Kgs.	SN - 516
	115	90	80		1720		240	150	434 Kgs.	SN - 518
	130	100	90		1755		267,5	170	474 Kgs.	SN - 520
800	140	110	100	1150	1785	1390	292,5	190	535 Kgs.	SN - 522
	155	125	110		1815		312,5	200	613 Kgs.	SN - 524
	165	135	125		1850		340	220	766 Kgs.	SN - 524
	115	90	80		1720		240	150	587 Kgs.	SN - 518
1000	130	100	90	1150	1755	1390	267,5	170	627 Kgs.	SN - 520
	140	110	100		1785		292,5	190	688 Kgs.	SN - 522
	155	125	110		1815		312,5	200	766 Kgs.	SN - 524
	165	135	125		1850		340	220	829 Kgs.	SN - 528
1000	130	100	90	1150	1755	1390	267,5	170	864 Kgs.	SN - 518
	140	110	100		1785		292,5	190	925 Kgs.	SN - 520
	155	125	110		1815		312,5	200	1003 Kgs.	SN - 522
	165	135	125		1850		340	220	1066 Kgs.	SN - 524
	170	140	130		1875		357,5	230	1099 Kgs.	SN - 528

TAMBOR DE MANDO


BANDA DE 1000 mm.

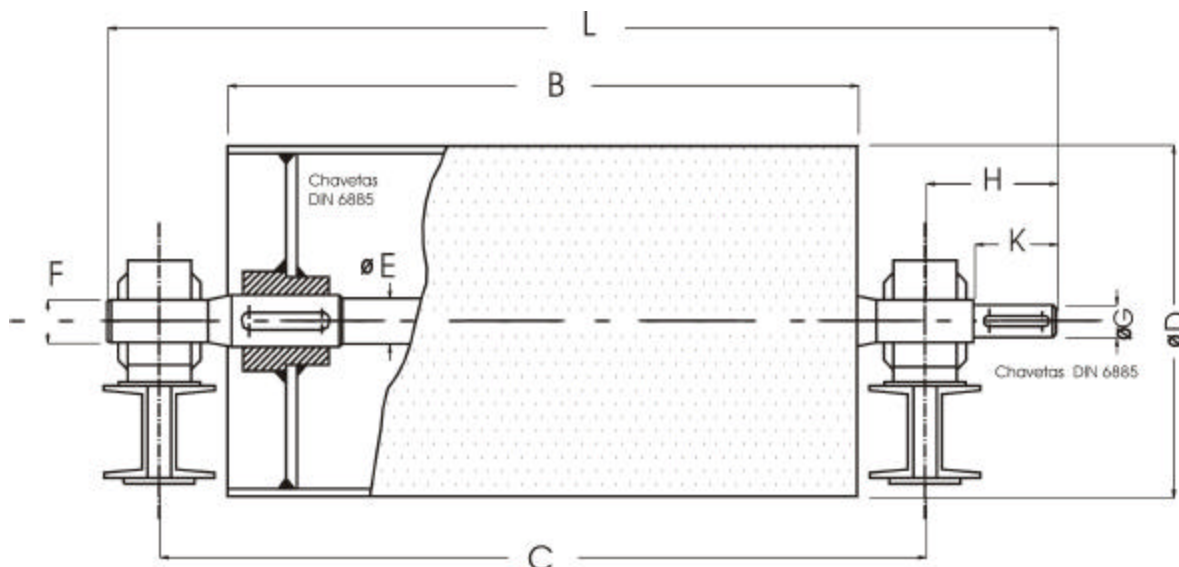

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
414	70	60	50	1150	1610	1390	155	90	168 Kgs.	SN - 513
	80	70	60		1640		180	110	191 Kgs.	SN - 516
	90	80	70		1685		212,5	130	218 Kgs.	SN - 518
	100	90	80		1720		240	150	250 Kgs.	SN - 520
500	80	70	60	1150	1640	1390	180	110	250 Kgs.	SN - 516
	90	80	70		1685		212,5	130	278 Kgs.	SN - 518
	100	90	80		1720		240	150	309 Kgs.	SN - 520
	110	100	90		1755		267,5	170	346 Kgs.	SN - 522
630	120	110	100	1150	1785	1390	292,5	190	389 Kgs.	SN - 524
	90	80	70		1685		212,5	130	376 Kgs.	SN - 518
	100	90	80		1720		240	150	407 Kgs.	SN - 520
	110	100	90		1755		267,5	170	444 Kgs.	SN - 522
800	120	110	100	1150	1785	1390	292,5	190	487 Kgs.	SN - 524
	135	125	110		1815		312,5	200	559 Kgs.	SN - 528
	145	135	125		1850		340	220	770 Kgs.	SN - 530
	110	100	90		1755		267,5	170	834 Kgs.	SN - 522
1000	120	110	100	1150	1785	1390	292,5	190	877 Kgs.	SN - 524
	135	125	110		1815		312,5	200	949 Kgs.	SN - 528
	145	135	125		1850		340	220	1007 Kgs.	SN - 530
	150	140	130		1875		357,5	230	1039 Kgs.	SN - 532

TAMBOR DE REENVIO


BANDA DE 1000 mm.

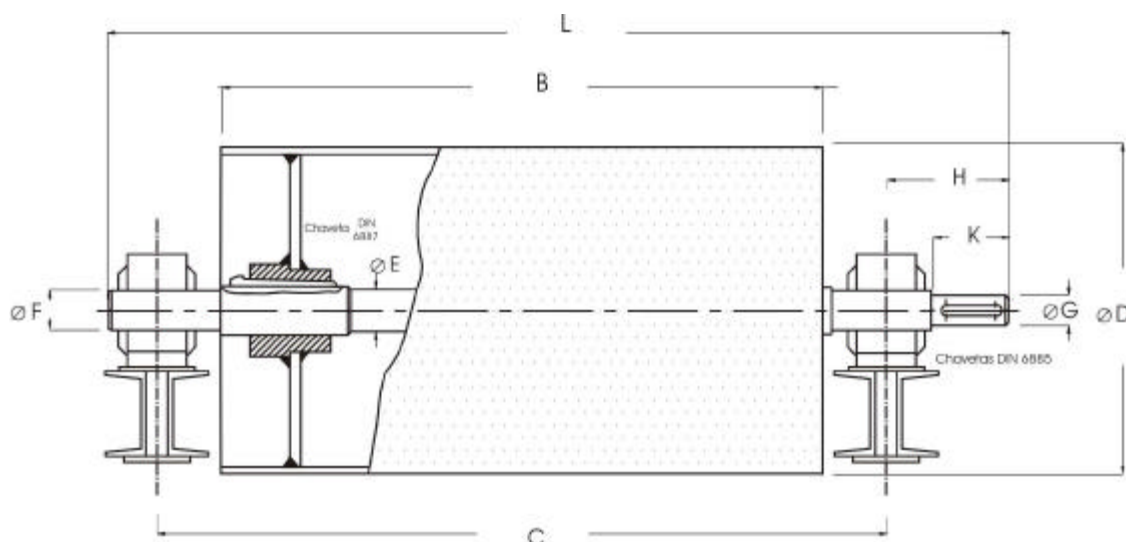

D	E	F	B	L	C	PESO	SOPORTES
241	55	40	1150	1495	1390	75 Kgs.	SN - 509
	65	50		1505		89 Kgs.	SN - 511
	80	60		1520		114 Kgs.	SN - 513
	90	70		1530		138 Kgs.	SN - 516
	105	80		1555		172 Kgs.	SN - 518
315	55	40	1150	1495	1390	91 Kgs.	SN - 509
	65	50		1505		105 Kgs.	SN - 511
	80	60		1520		130 Kgs.	SN - 513
	90	70		1530		154 Kgs.	SN - 516
	105	80		1555		188 Kgs.	SN - 518
414	65	50	1150	1505	1390	153 Kgs.	SN - 511
	80	60		1520		178 Kgs.	SN - 513
	90	70		1530		202 Kgs.	SN - 516
	105	80		1555		236 Kgs.	SN - 518
	115	90		1570		269 Kgs.	SN - 520
500	80	60	1150	1520	1390	237 Kgs.	SN - 513
	90	70		1530		261 Kgs.	SN - 516
	105	80		1555		295 Kgs.	SN - 518
	115	90		1570		328 Kgs.	SN - 520
	130	100		1585		374 Kgs.	SN - 522
630	90	70	1150	1530	1390	361 Kgs.	SN - 516
	105	80		1555		393 Kgs.	SN - 518
	115	90		1570		426 Kgs.	SN - 520
	130	100		1585		472 Kgs.	SN - 522
	140	110		1595		515 Kgs.	SN - 524

TAMBOR DE REENVIO


BANDA DE 1000 mm.

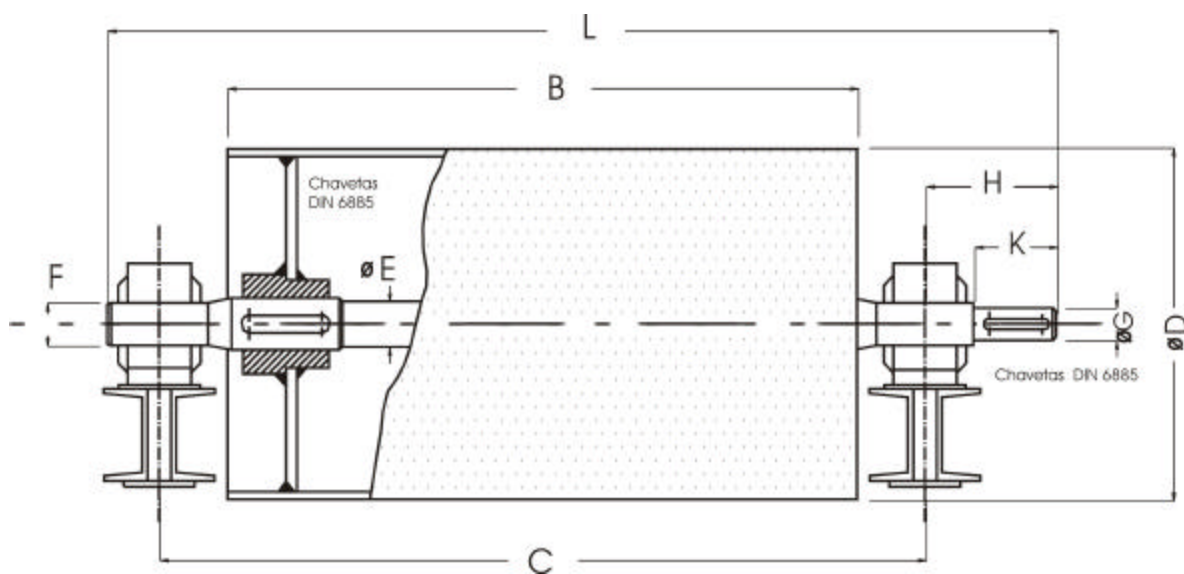

D	E	F	B	L	C	PESO	SOPORTES
241	50	40	1150	1495	1390	71 Kgs.	SN - 509
	60	50		1505		84 Kgs.	SN - 511
	70	60		1520		101 Kgs.	SN - 513
	80	70		1530		123 Kgs.	SN - 516
	90	80		1555		147 Kgs.	SN - 518
315	50	40	1150	1495	1390	87 Kgs.	SN - 509
	60	50		1505		100 Kgs.	SN - 511
	70	60		1520		117 Kgs.	SN - 513
	80	70		1530		139 Kgs.	SN - 516
	90	80		1555		163 Kgs.	SN - 518
414	60	50	1150	1505	1390	148 Kgs.	SN - 511
	70	60		1520		165 Kgs.	SN - 513
	80	70		1530		187 Kgs.	SN - 516
	90	80		1555		211 Kgs.	SN - 518
	100	90		1570		241 Kgs.	SN - 520
500	70	60	1150	1520	1390	224 Kgs.	SN - 513
	80	70		1530		246 Kgs.	SN - 516
	90	80		1555		270 Kgs.	SN - 518
	100	90		1570		300 Kgs.	SN - 520
	110	100		1585		333 Kgs.	SN - 522
630	80	50	1150	1530	1390	346 Kgs.	SN - 516
	90	60		1555		368 Kgs.	SN - 518
	100	70		1570		398 Kgs.	SN - 520
	110	80		1585		431 Kgs.	SN - 522
	120	90		1595		470 Kgs.	SN - 524

TAMBOR DE MANDO


BANDA DE 1200 mm.

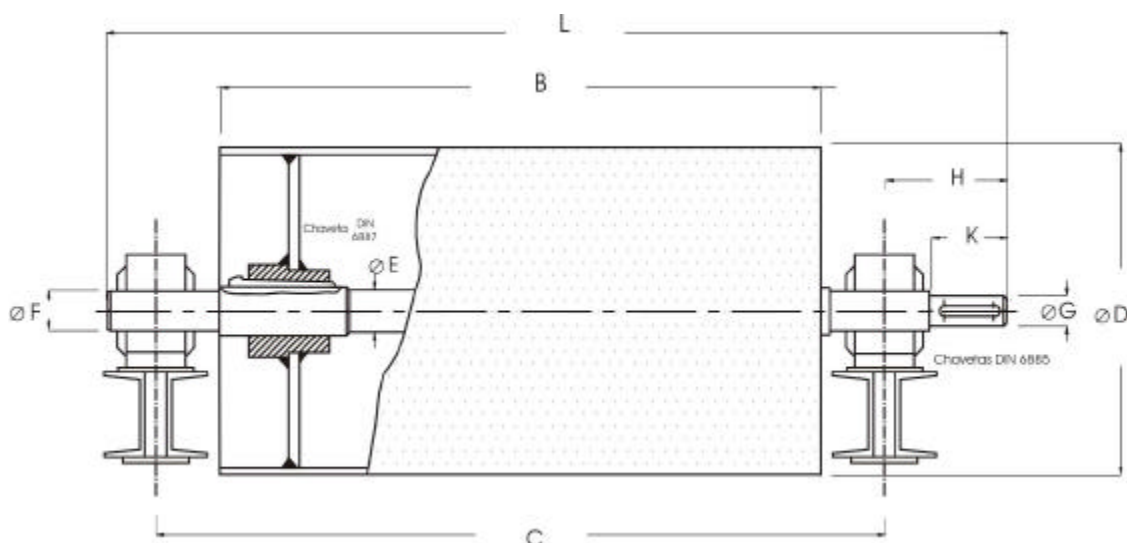

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
500	90	70	60	1400	1900	1650	180	110	310 Kgs.	SN - 516
	105	80	70		1945		212,5	130	353 Kgs.	SN - 518
	115	90	80		1980		240	150	391 Kgs.	SN - 520
	130	100	90		2015		267,5	170	449 Kgs.	SN - 522
	140	110	100		2045		292,5	190	499 Kgs.	SN - 524
630	105	80	70	1400	1945	1650	212,5	130	466 Kgs.	SN - 518
	115	90	80		1980		240	150	504 Kgs.	SN - 520
	130	100	90		2015		267,5	170	562 Kgs.	SN - 522
	140	110	100		2045		292,5	190	612 Kgs.	SN - 524
	155	125	110		2075		312,5	200	698 Kgs.	SN - 528
800	115	90	80	1400	1980	1650	267,5	170	813 Kgs.	SN - 522
	130	100	90		2015		292,5	190	867 Kgs.	SN - 524
	140	110	100		2045		312,5	200	958 Kgs.	SN - 528
	155	125	110		2075		340	220	1029 Kgs.	SN - 530
	165	135	125		2110		357,5	230	1110 Kgs.	SN - 532
1000	130	100	90	1400	2015	1650	267,5	170	1003 Kgs.	SN - 522
	140	110	100		2045	1650	292,5	190	1053 Kgs.	SN - 524
	155	125	110		2075	1650	312,5	200	1139 Kgs.	SN - 528
	165	135	125		2160	1700	340	220	1206 Kgs.	SN - 530
	170	140	130		2185	1700	357,5	230	1319 Kgs.	SN - 532
1250	140	110	100	1400	2045	1650	292,5	190	1438 Kgs.	SN - 528
	155	125	110		2075	1650	312,5	200	1524 Kgs.	SN - 530
	165	135	125		2160	1700	340	220	1591 Kgs.	SN - 532
	170	140	130		2185	1700	357,5	230	1704 Kgs.	SD - 3136
	195	160	150		2220	1700	390	260	1856 Kgs.	SD - 3140

TAMBOR DE MANDO


BANDA DE 1200 mm.

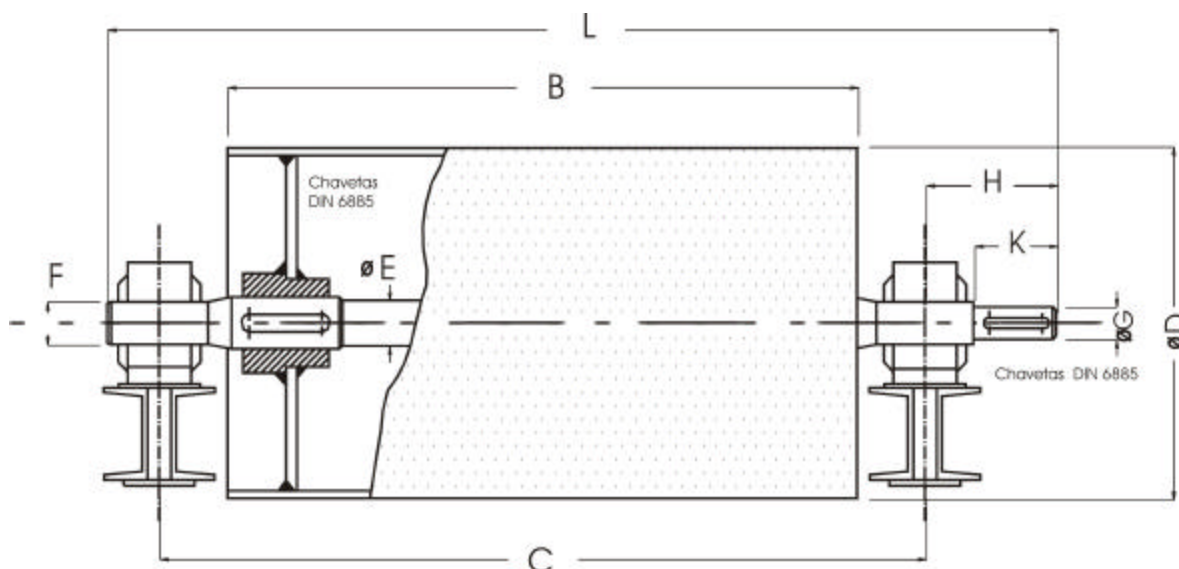

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
500	80	70	60	1400	1900	1650	180	110	290 Kgs.	SN - 516
	90	80	70		1945		212,5	130	321 Kgs.	SN - 518
	100	90	80		2015		240	150	355 Kgs.	SN - 520
	110	100	90		2045		267,5	170	395 Kgs.	SN - 522
	120	110	100		2045		292,5	190	442 Kgs.	SN - 524
630	90	80	70	1400	1945	1650	212,5	130	434 Kgs.	SN - 518
	100	90	80		1980		240	150	468 Kgs.	SN - 520
	110	100	90		2015		267,5	170	508 Kgs.	SN - 522
	120	110	100		2045		292,5	190	555 Kgs.	SN - 524
	135	125	110		2075		312,5	200	633 Kgs.	SN - 528
800	100	90	80	1400	1980	1650	240	150	644 Kgs.	SN - 520
	110	100	90		2015		267,5	170	684 Kgs.	SN - 522
	120	110	100		2045		292,5	190	731 Kgs.	SN - 524
	135	125	110		2075		312,5	200	809 Kgs.	SN - 528
	145	135	125		2110		340	220	871 Kgs.	SN - 530
1000	110	100	90	1400	2015	1650	267,5	170	949 Kgs.	SN - 522
	120	110	100		2045	1650	292,5	190	996 Kgs.	SN - 524
	135	125	110		2075	1650	312,5	200	1074 Kgs.	SN - 528
	145	135	125		2160	1700	340	220	1136 Kgs.	SN - 530
	160	140	130		2185	1700	357,5	230	1247 Kgs.	SN - 532
1250	120	110	100	1400	2045	1650	292,5	190	1381 Kgs.	SN - 524
	135	125	110		2075	1650	312,5	200	1459 Kgs.	SN - 528
	145	135	125		2160	1700	340	220	1521 Kgs.	SN - 530
	160	140	130		2185	1700	357,5	230	1632 Kgs.	SN - 532
	180	160	150		2220	1700	390	260	1795 Kgs.	SD - 3136

TAMBOR DE REENVIO


BANDA DE 1200 mm.

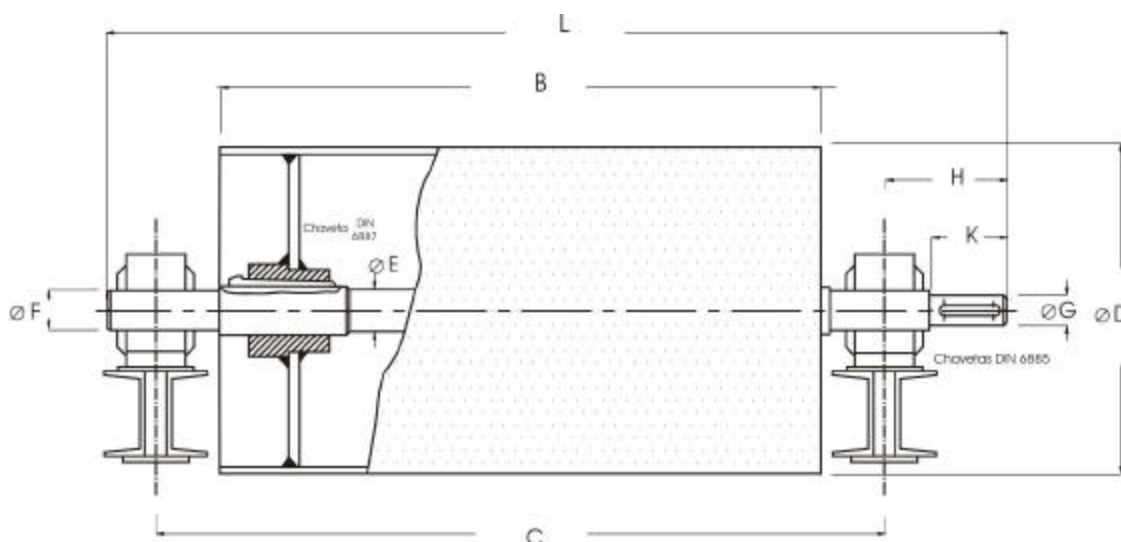

D	E	F	B	L	C	PESO	SOPORTES
315	65	50	1400	1765	1650	125 Kgs.	SN - 511
	80	60		1780		155 Kgs.	SN - 513
	90	70		1790		180 Kgs.	SN - 516
	105	80		1815		222 Kgs.	SN - 518
	115	90		1830		257 Kgs.	SN - 520
414	80	60	1400	1780	1650	211 Kgs.	SN - 513
	90	70		1790		236 Kgs.	SN - 516
	105	80		1815		278 Kgs.	SN - 518
	115	90		1830		313 Kgs.	SN - 520
	130	100		1845		366 Kgs.	SN - 522
500	80	60	1400	1780	1650	280 Kgs.	SN - 516
	90	70		1790		305 Kgs.	SN - 518
	105	80		1815		346 Kgs.	SN - 520
	115	90		1830		380 Kgs.	SN - 522
	130	100		1845		435 Kgs.	SN - 524
630	90	70	1400	1790	1650	422 Kgs.	SN - 516
	105	80		1815		459 Kgs.	SN - 518
	115	90		1830		495 Kgs.	SN - 520
	130	100		1845		548 Kgs.	SN - 522
	140	110		1855		595 Kgs.	SN - 524
800	105	80	1400	1815	1650	635 Kgs.	SN - 518
	115	90		1830		671 Kgs.	SN - 520
	130	100		1845		724 Kgs.	SN - 522
	140	110		1855		771 Kgs.	SN - 524
	155	125		1875		852 Kgs.	SN - 528

TAMBOR DE REENVIO


BANDA DE 1200 mm.

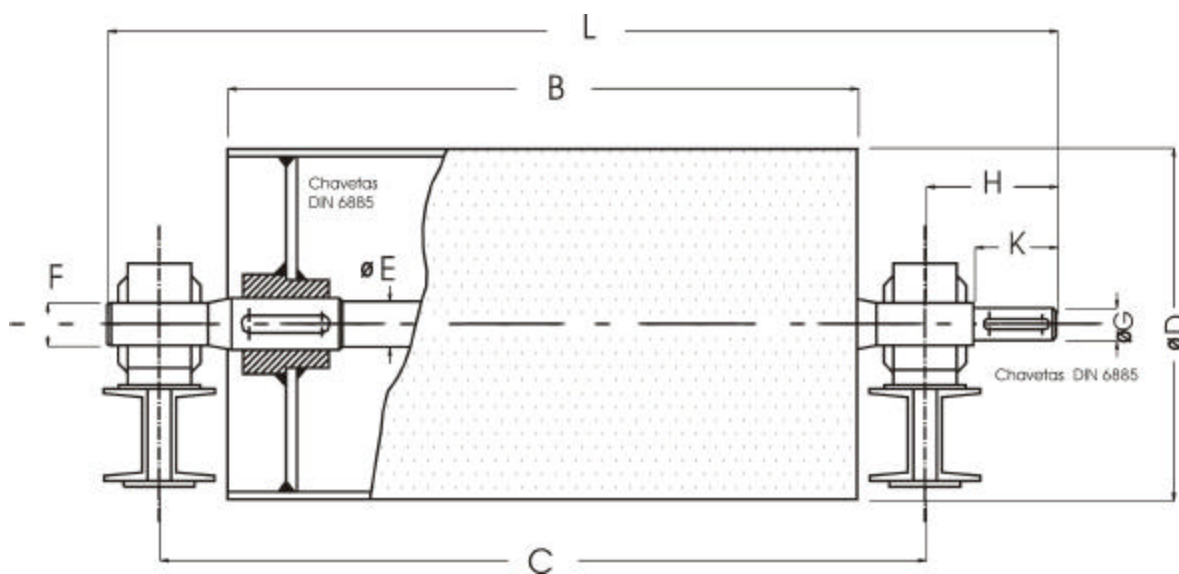

D	E	F	B	L	C	PESO	SOPORTES
315	60	50	1400	1765	1650	118 Kgs.	SN - 511
	70	60		1780		138 Kgs.	SN - 513
	80	70		1790		161 Kgs.	SN - 516
	90	80		1815		190 Kgs.	SN - 518
	100	90		1830		221 Kgs.	SN - 520
414	70	60	1400	1780	1650	194 Kgs.	SN - 513
	80	70		1790		217 Kgs.	SN - 516
	90	80		1815		246 Kgs.	SN - 518
	100	90		1830		277 Kgs.	SN - 520
	110	100		1845		313 Kgs.	SN - 522
500	70	60	1400	1780	1650	263 Kgs.	SN - 513
	80	70		1790		286 Kgs.	SN - 516
	90	80		1815		314 Kgs.	SN - 518
	100	90		1830		346 Kgs.	SN - 520
	110	100		1845		382 Kgs.	SN - 522
630	80	70	1400	1790	1650	403 Kgs.	SN - 516
	90	80		1815		427 Kgs.	SN - 518
	100	90		1830		459 Kgs.	SN - 520
	110	100		1845		495 Kgs.	SN - 522
	120	120		1855		538 Kgs.	SN - 524
630	90	80	1400	1815	1650	603 Kgs.	SN - 518
	100	90		1830		635 Kgs.	SN - 520
	110	100		1845		671 Kgs.	SN - 522
	120	110		1855		714 Kgs.	SN - 524
	135	125		1875		787 Kgs.	SN - 528

TAMBOR DE MANDO


BANDA DE 1400 mm.

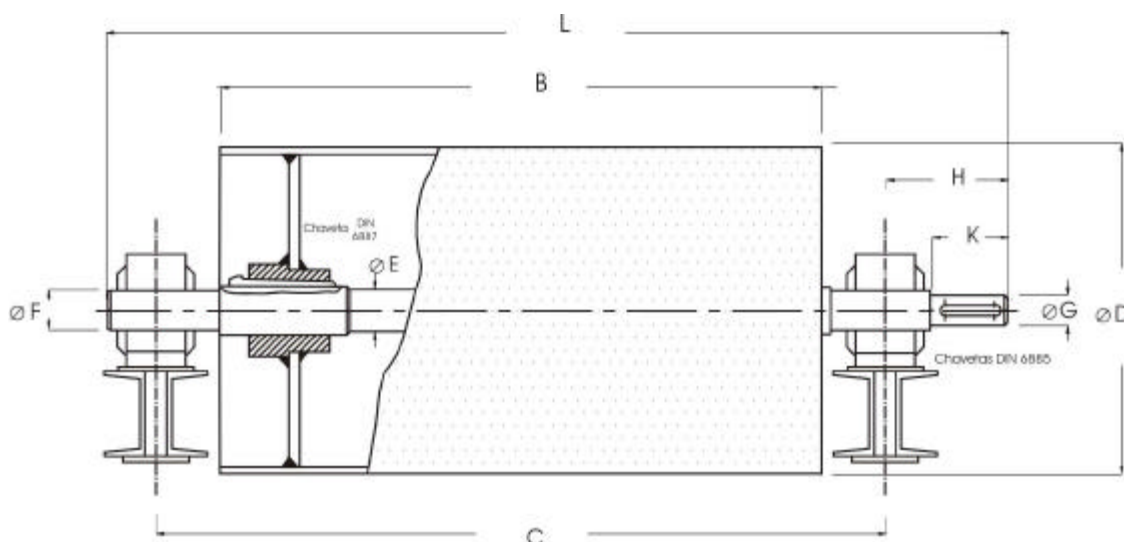

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
500	105	80	70	1600	2145	1850	212,5	130	391 Kgs.	SN - 518
	115	90	80		2180		240	150	432 Kgs.	SN - 520
	130	100	90		2215		267,5	170	494 Kgs.	SN - 522
	140	110	100		2245		292,5	190	548 Kgs.	SN - 524
	155	125	110		2275		312,5	200	637 Kgs.	SN - 528
630	115	90	80	1600	2180	1850	240	150	557 Kgs.	SN - 520
	130	100	90		2215		267,5	170	619 Kgs.	SN - 522
	140	110	100		2245		292,5	190	673 Kgs.	SN - 524
	155	125	110		2275		312,5	200	764 Kgs.	SN - 528
	165	135	125		2310		340	220	836 Kgs.	SN - 530
800	130	100	90	1600	2215	1850	267,5	170	813 Kgs.	SN - 522
	140	110	100		2245	1850	292,5	190	867 Kgs.	SN - 524
	155	125	110		2275	1850	312,5	200	958 Kgs.	SN - 528
	165	135	125		2310	1900	340	220	1029 Kgs.	SN - 530
	170	140	130		2385	1900	357,5	230	1110 Kgs.	SN - 532
1000	140	110	100	1600	2245	1850	292,5	190	1155 Kgs.	SN - 524
	155	125	110		2275	1850	312,5	200	1246 Kgs.	SN - 528
	165	135	125		2310	1900	340	220	1317 Kgs.	SN - 530
	170	140	130		2385	1900	357,5	230	1398 Kgs.	SN - 532
	195	160	150		2470	1900	390	260	1605 Kgs.	SD - 3136
1250	155	125	110	1600	2275	1900	312,5	200	1663 Kgs.	SN - 528
	165	135	125		2310	1900	340	220	1734 Kgs.	SN - 530
	170	140	130		2385	1900	357,5	230	1815 Kgs.	SN - 532
	195	160	150		2470	1950	390	260	2022 Kgs.	SD - 3136
	220	180	170		2550	1950	450	300	2273 Kgs.	SD - 3140

TAMBOR DE MANDO


BANDA DE 1400 mm.

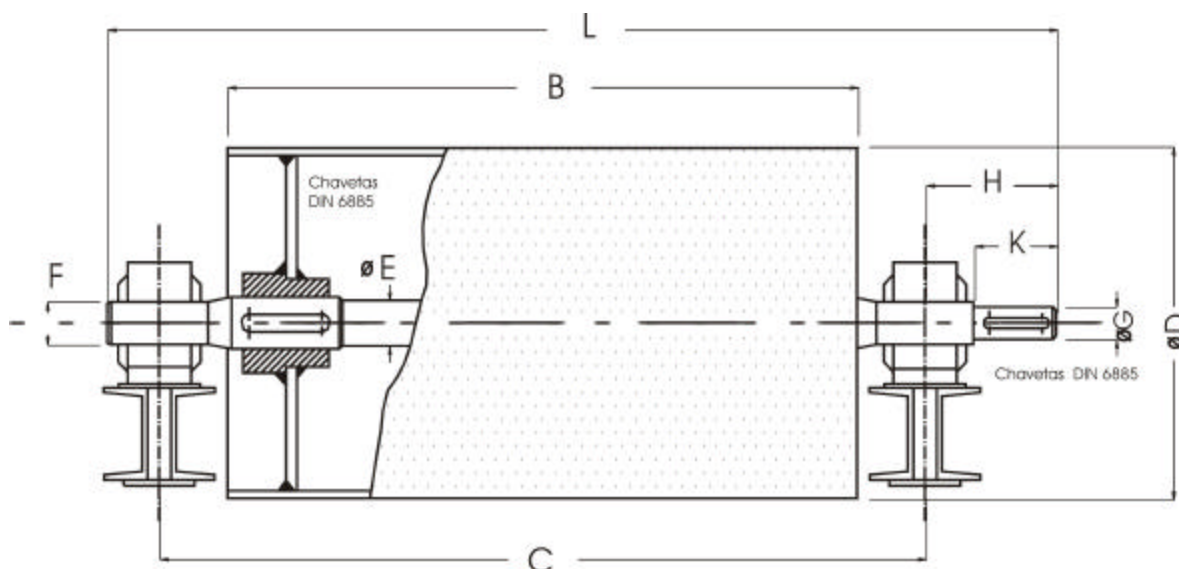

D	E	F	G	B	L	C	H	K	PESO	SOPORTES
500	90	80	70	1600	2145	1850	212,5	130	355 Kgs.	SN - 518
	100	90	80		2180		240	150	392 Kgs.	SN - 520
	110	100	90		2215		267,5	170	434 Kgs.	SN - 522
	120	110	100		2245		292,5	190	484 Kgs.	SN - 524
	135	125	110		2275		312,5	200	567 Kgs.	SN - 528
630	100	90	80	1600	2180	1850	240	150	517 Kgs.	SN - 520
	110	100	90		2215		267,5	170	559 Kgs.	SN - 522
	120	110	100		2245		292,5	190	609 Kgs.	SN - 524
	135	125	110		2275		312,5	200	692 Kgs.	SN - 528
	145	135	125		2310		340	220	757 Kgs.	SN - 530
800	110	100	90	1600	2215	1850	267,5	170	753 Kgs.	SN - 522
	120	110	100		2245	1850	292,5	190	803 Kgs.	SN - 524
	135	125	110		2275	1850	312,5	200	886 Kgs.	SN - 528
	145	135	125		2360	1900	340	220	951 Kgs.	SN - 530
	160	140	130		2385	1900	357,5	230	1068 Kgs.	SN - 532
1000	120	110	100	1600	2245	1850	292,5	190	1091 Kgs.	SN - 524
	135	125	110		2275	1850	312,5	200	1174 Kgs.	SN - 528
	145	135	125		2360	1900	340	220	1239 Kgs.	SN - 530
	160	140	130		2385	1900	357,5	230	1356 Kgs.	SN - 532
	180	160	150		2470	1900	390	260	1537 Kgs.	SD - 3136
1250	135	125	110	1600	2275	1900	312,5	200	1591 Kgs.	SN - 528
	145	135	125		2360	1900	340	220	1656 Kgs.	SN - 530
	160	140	130		2385	1900	357,5	230	1773 Kgs.	SN - 532
	180	160	150		2470	1950	390	260	1954 Kgs.	SD - 3136
	200	180	170		2550	1950	450	300	2169 Kgs.	SD - 3140

TAMBOR DE REENVIO


BANDA DE 1400 mm.

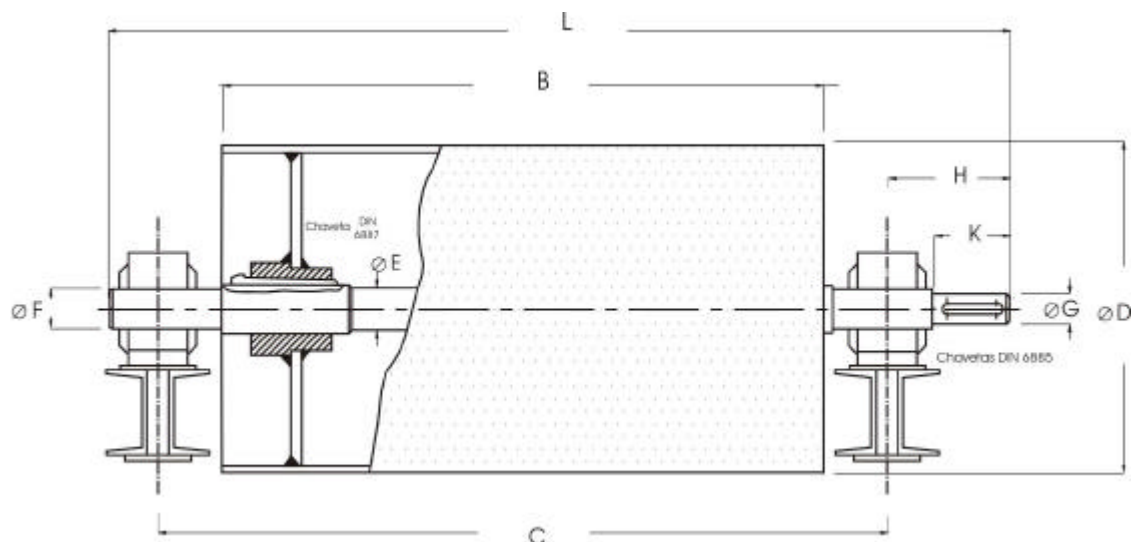

D	E	F	B	L	C	PESO	SOPORTES
315	65	50	1600	1965	1850	139 Kgs.	SN - 511
	80	60		1980		171 Kgs.	SN - 513
	90	70		1990		199 Kgs.	SN - 516
	105	80		2015		245 Kgs.	SN - 518
	115	90		2030		283 Kgs.	SN - 520
414	80	60	1600	1980	1850	233 Kgs.	SN - 513
	90	70		1990		261 Kgs.	SN - 516
	105	80		2015		307 Kgs.	SN - 518
	115	90		2030		345 Kgs.	SN - 520
	130	100		2045		403 Kgs.	SN - 522
500	90	70	1600	1990	1850	238 Kgs.	SN - 516
	105	80		2015		384 Kgs.	SN - 518
	115	90		2030		423 Kgs.	SN - 520
	130	100		2045		482 Kgs.	SN - 522
	140	110		2055		531 Kgs.	SN - 524
630	105	70	1600	2015	1850	509 Kgs.	SN - 518
	115	80		2030		548 Kgs.	SN - 520
	130	90		2045		607 Kgs.	SN - 522
	140	100		2055		656 Kgs.	SN - 524
	155	110		2075		741 Kgs.	SN - 528
800	115	90	1600	2030	1850	742 Kgs.	SN - 520
	130	100		2045		801 Kgs.	SN - 522
	140	110		2055		850 Kgs.	SN - 524
	155	125		2075		935 Kgs.	SN - 528
	165	135		2090		998 Kgs.	SN - 530

TAMBOR DE REENVIO

BANDA DE 1400 mm.

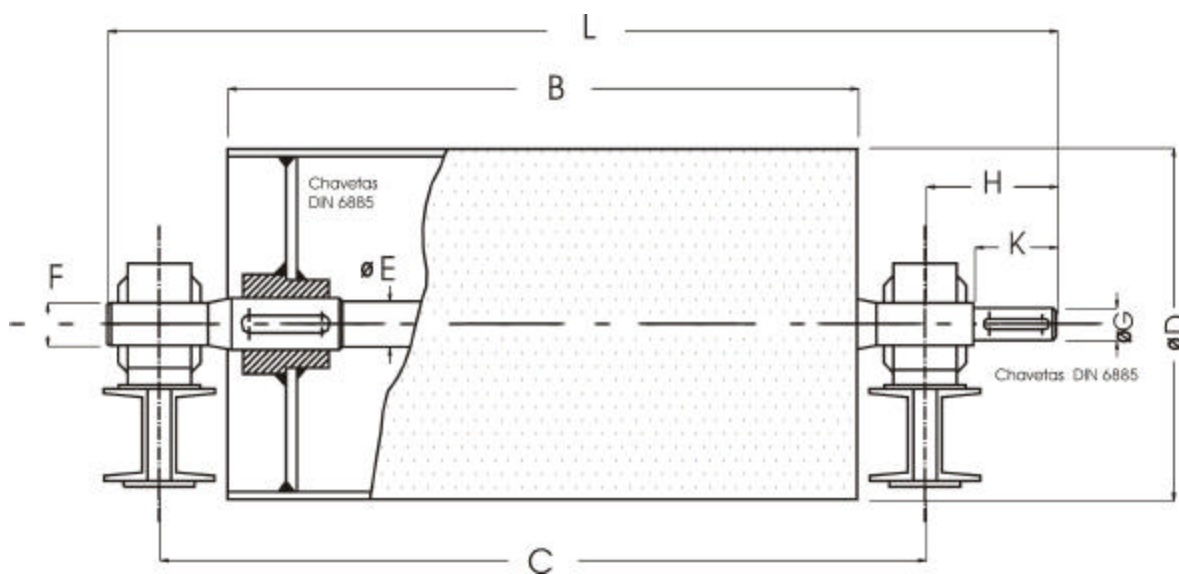

D	E	F	B	L	C	PESO	SOPORTES
315	60	50	1600	1965	1850	132 Kgs.	SN - 511
	70	60		1980		153 Kgs.	SN - 513
	80	70		1990		178 Kgs.	SN - 516
	90	80		2015		209 Kgs.	SN - 518
	100	90		2030		243 Kgs.	SN - 520
414	70	60	1600	1980	1850	215 Kgs.	SN - 513
	80	70		1990		240 Kgs.	SN - 516
	90	80		2015		271 Kgs.	SN - 518
	100	90		2030		305 Kgs.	SN - 520
	110	100		2045		344 Kgs.	SN - 522
500	80	70	1600	1990	1850	317 Kgs.	SN - 516
	90	80		2015		348 Kgs.	SN - 518
	100	90		2030		383 Kgs.	SN - 520
	110	100		2045		423 Kgs.	SN - 522
	120	110		2055		467 Kgs.	SN - 524
630	90	80	1600	2015	1850	473 Kgs.	SN - 518
	100	90		2030		508 Kgs.	SN - 520
	110	100		2045		548 Kgs.	SN - 522
	120	120		2055		592 Kgs.	SN - 524
	135	125		2075		670 Kgs.	SN - 528
630	100	90	1600	2030	1850	702 Kgs.	SN - 520
	110	100		2045		742 Kgs.	SN - 522
	120	110		2055		786 Kgs.	SN - 524
	135	125		2075		864 Kgs.	SN - 528
	145	135		2090		922 Kgs.	SN - 530